


	J K	
Į_	· · · · · · · · · · · · · · · · · · ·	
~~~	CIFICATION	
	CIFICATION	
JMENS	5700	1
ATTAGE	55	
<u>o. LEDs</u>	12	
@ 12V	4.6	
@ 24V	2.35	
MANGLE	60 DEG FWHM	
DIAMTER	110mm 4.33"	
D HEIGHT	17.6mm 0.96"	
ALL LENGTH	30mm	2
T HOLE PCD	) 98mm	
UTOUT DIA		
ERTURE	70mm	
/EIGHT	500gm	
OLTAGE. CUI	RRENT & REVERSE POLARITY	
CTION WITH	I INBUILT ACTIVE THERMAL	
/	CONTROL	
(		3
		S
	60° BEAM ANGLE	
		4
and a second		
M		
TAA		
		5
A has		J
J. A.	North III	
V		
		6
1		
Į		
	•	
		7
		1
EET: 1 OF 3	SCALE: 1:1 @ A3	
RANHA P12		
<b>-</b>		
E PART DRAWIN	GS	
		~
PART DRAWIN	GS	8
	ISSUE: REV: STATUS:	
A00	B00 A RELEASED	
~ ~ ~ ~		

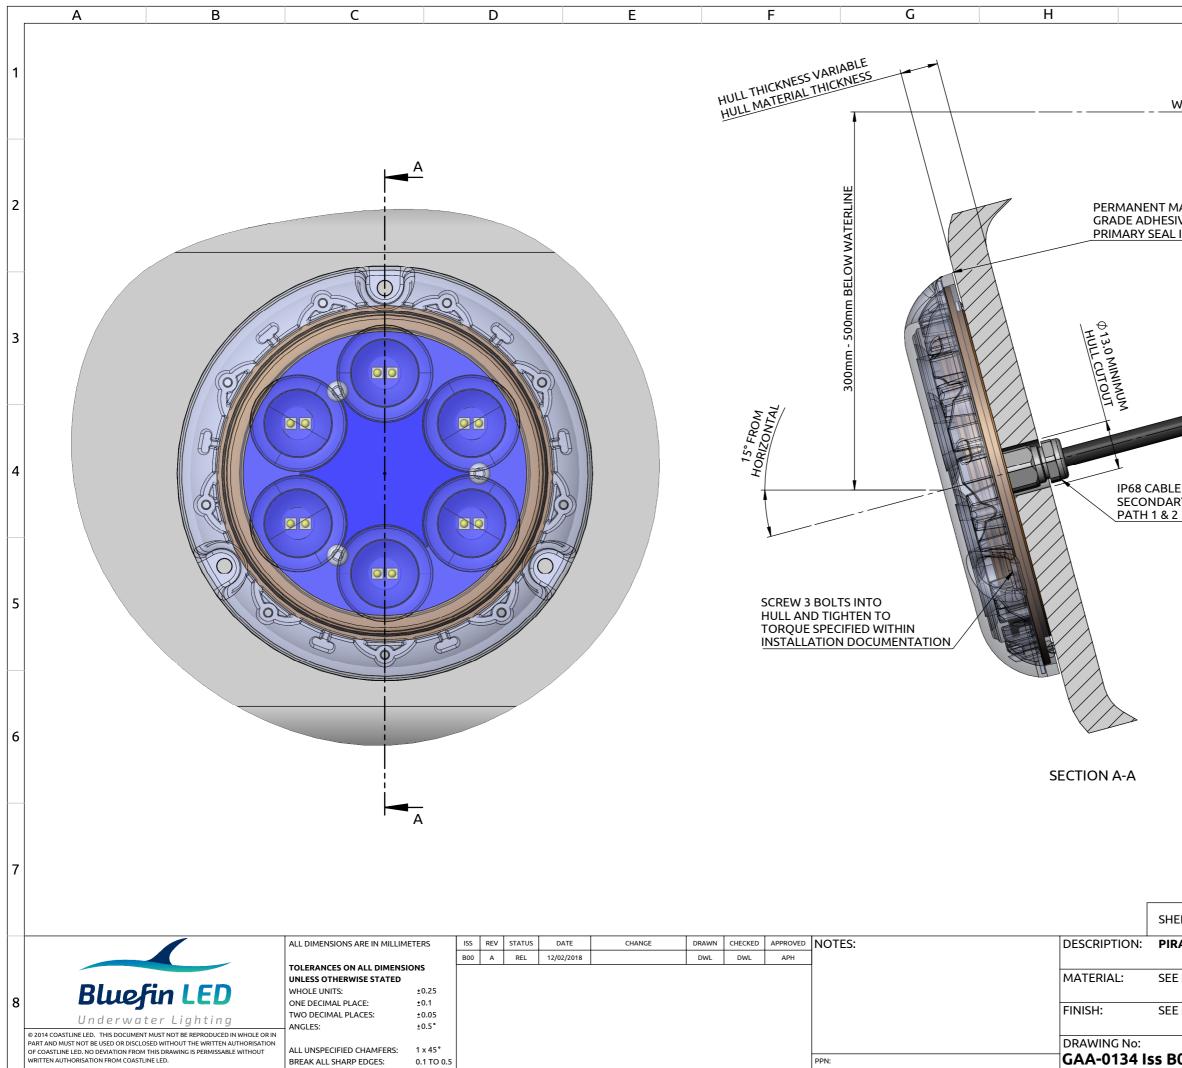

I		J			К	
						1
WATERLINE	_					
MARINE SIVE SEALANT L INGRESS PATH	<u>1 8 2</u>					2
						3
						4
LE GLAND NRY SEAL INGRE 2	SS —					
						5
						6
						7
IEET: <b>2 OF 3</b>	SCA	ALE: <b>1:1</b> (	@ A 3			7
RANHA P12		1.1			PROJECTION	
E PART DRAWIN	IGS					
E PART DRAWIN	IGS					8
300A		ISSUE: B00	REV:	STATUS:	ED	
~~~		1000				