

EXHIBITORS



EXHIBITOR
18 UNITS



EXHIBITOR
36 UNITS




EXHIBITOR
+50 UNITS



EXHIBITOR
10 UNITS

TECHNOLOGIES

LENS PROTECTION

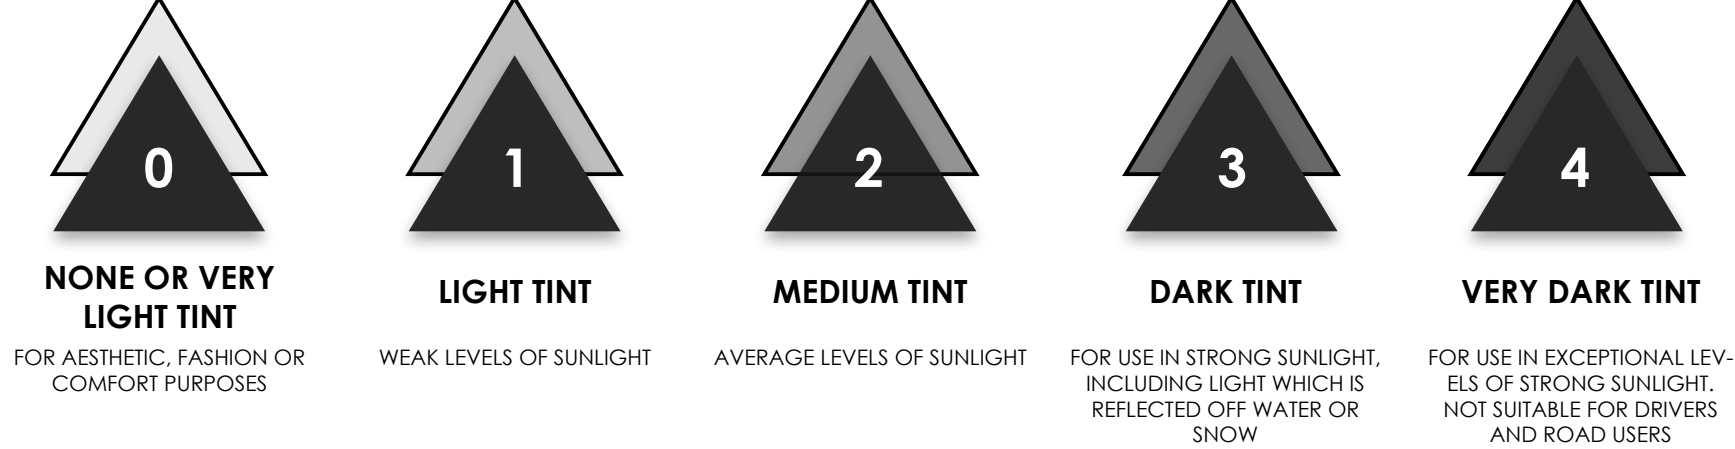

PHOTOCHROMIC LENS		SPEED OF RETURN	
EASSUN Cat. 1 to 3		155 sec. (2.5 min)	
COMPETITOR (CAST) Cat. 1 to 3		184 sec. (3min)	
EASSUN Cat. 1 to 2		157 sec. (2.5 min)	
COMPETITOR (CAST) Cat. 1 to 2		200 sec. (3min)	

DESCRIPTION PHOTOCHROMIC LENSES
STANDARDS EN1836, ANSI Z80.3, AS/NZS 1067
APPLICATION SPORT - URBAN - FASHION
MATERIAL POLYCARBONATE
TYPE NO POLARIZED
IMPACT RESISTANCE DROP BALL TEST
UV PROTECTION 100%

- MAXIMUM PROTECTION
- CONVENIENCE
- HIGH PHOTOCHROMIC PERFORMANCE
- FAST DARKENING AND FADING
- DURABILITY