

2600mAh
ARB-L18-2600U



MICRO-USB CHARGING PORT



While charging




Fully charged

2600mAh
ARB-L18-2600U

**Protection circuit
in the anode**

- Overcharge protection
- Over-discharge protection
- Short circuit protection
- Overheat protection

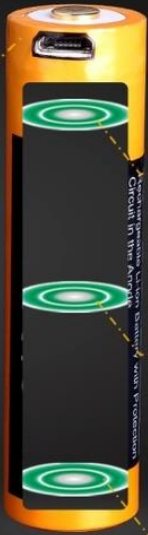

3 Sets of overheat protection

Pressure relief valve protection

Separate microporous protection

PTC cathodal block protection

MULTIPLE PROTECTION

Ensure the safety and good performance of the battery.


2600mAh
ARB-L18-2600U



SHORT CIRCUIT PROTECTION

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus the potential risk of short circuiting caused by collision or impact is hugely eliminated.

2600mAh
ARB-L18-2600U

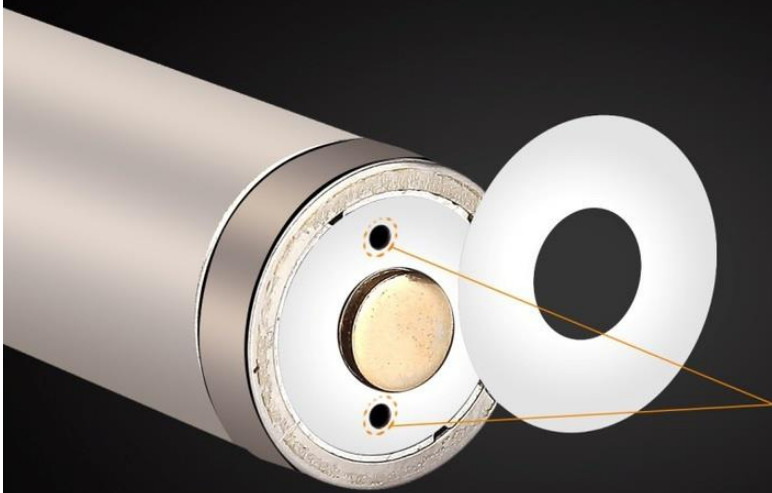

PRESSURE RELIEF VENT

Pressure relief vents which will expel gas generated by a possible internal short circuit, will prevent the cell inflating and eliminate secondary hazards such as possible explosions, ensure a safer battery, although this will rarely happen with this quality battery.

2600mAh
ARB-L18-2600U



500 CHARGE CYCLES

A properly maintained ARB-L18-2600U battery is designed to retain up to 75% of its original capacity even after 500 full charge and discharge cycles.

2600mAh
ARB-L18-2600U

TECHNICAL PARAMETERS



| | |
|------------------------------|---|
| MODEL | ARB-L18-2600U |
| CAPACITY | 2600mAh |
| VOLTAGE | 3.6V |
| CHARGING CURRENT BY CHARGER | 1A (recommended) 2A (maximum) |
| CHARGING CURRENT BY USB PORT | 1A |
| WEIGHT | 50g |
| SIZE | Diameter: 18.6mm Height: 70mm |
| WARRANTY PERIOD | 12 months free warranty period from date of purchase. |

- For use in: flashlights, headlamps, bicycle lights and camping lanterns that require 18650 batteries.
- Recommended charger: Fenix ARE-C1, ARE-C1⁺, ARE-C2, ARE-C2⁺, ARE-X1, ARE-X1⁺, ARE-X2.
- Charging options: USB port ✓ Charger ✓

Do not expose the battery to heat or discard of it in water. After extended periods of storage (three months or longer), it may be necessary to recharge the battery to regain maximum performance. Keep the battery out of the reach of children.

| | |
|-------------------------------------|--|
| MODEL | ARB-L18-2600U |
| CAPACITY | 2600mAh |
| VOLTAGE | 3.6V |
| CHARGING CURRENT BY CHARGER | 1A (recommended) 2A (maximum) |
| CHARGING CURRENT BY USB PORT | 1A |
| WEIGHT | 50g |
| SIZE | Diameter: 18.6mm Height: 70mm |
| WARRANTY PERIOD | 12 months free warranty period from date of purchase. |

- **For use in: flashlights, headlamps, bicycle lights and camping lanterns that require 18650 batteries.**
- **Recommended charger: Fenix ARE-C1, ARE-C1⁺, ARE-C2, ARE-C2⁺, ARE-X1, ARE-X1⁺, ARE-X2.**
- **Charging options: USB port ✓ Charger ✓**

Do not expose the battery to heat or discard of it in water. After extended periods of storage (three months or longer), it may be necessary to recharge the battery to regain maximum performance. Keep the battery out of the reach of children.