




GEOMETRY CHART

FLIP CHIP POSITION	(A) TT LENGTH		(B) SEAT TUBE LENGTH		(C) CHAINSTAY LENGTH ACTUAL		(D) HORIZONTAL CHAINSTAY		(E) FRONT CENTER		(F) WHEELBASE		(G) BB DROP		(H) HEADTUBE LENGTH		(I) HEADTUBE ANGLE		(J) SEATTUBE ANGLE		(K) STANDOVER HEIGHT		(L) REACH		(M) STACK	
	HIGH MODE	LOW MODE					HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE		HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	
SM	573	574	376	435	434	726	726	1160	1160	32	39	90	66.0	65.0	75.8	75.2	682	675	420	413	610	614				
MD	596	598	406	435	434	748	748	1181	1182	32	39	95	66.0	65.0	75.8	75.2	712	705	440	433	615	619				
LG	622	624	446	435	434	775	776	1208	1209	32	39	100	66.0	65.0	75.8	75.2	744	734	465	458	619	623				
XL	650	653	496	435	434	806	807	1240	1241	32	39	115	66.0	65.0	75.8	75.2	769	763	490	483	633	637				

FLIP CHIP POSITION	(A) TT LENGTH		(B) SEAT TUBE LENGTH		(C) CHAINSTAY LENGTH ACTUAL		(D) HORIZONTAL CHAINSTAY		(E) FRONT CENTER		(F) WHEELBASE		(G) BB DROP		(H) HEADTUBE LENGTH		(I) HEADTUBE ANGLE		(J) SEATTUBE ANGLE		(K) STANDOVER HEIGHT		(L) REACH		(M) STACK	
	HIGH MODE	LOW MODE					HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE		HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	HIGH MODE	LOW MODE	
SM	22.6	22.6	14.8	17.1	17.2	28.6	28.6	45.7	45.7	1.26	1.54	3.5	66.0	65.0	75.8	75.2	26.9	26.6	16.5	16.3	24.0	24.2				
MD	23.5	23.5	16.0	17.1	17.2	29.4	29.5	46.5	46.5	1.26	1.54	3.7	66.0	65.0	75.8	75.2	28.0	27.7	17.3	17.0	24.2	24.3				
LG	24.5	24.6	17.6	17.1	17.2	30.6	30.6	47.6	47.6	1.26	1.54	3.9	66.0	65.0	75.8	75.2	29.3	28.9	18.3	18.0	24.4	24.5				
XL	25.6	25.7	19.5	17.1	17.2	31.7	31.8	48.8	48.9	1.26	1.54	4.5	66.0	65.0	75.8	75.2	30.3	30.0	19.3	19.0	24.9	25.1				

GEOMETRY KEY

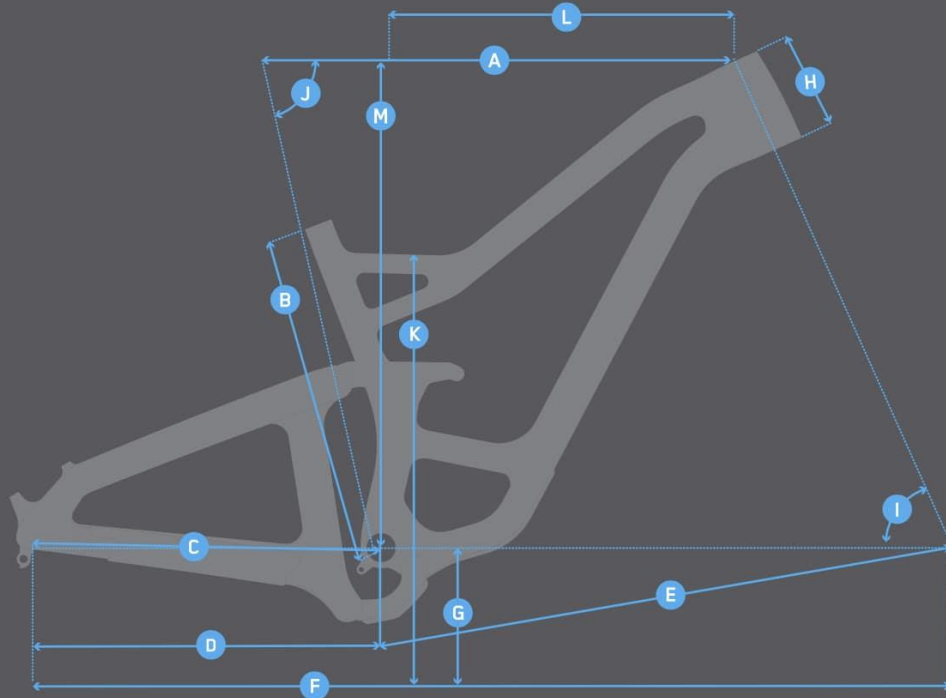



TECHNICAL SPECIFICATIONS

FRAME FITTINGS	ALL SIZES HAVE 1 BOTTLE CAGE MOUNT INSIDE FRONT TRIANGLE	REAR SUSPENSION TRAVEL	140MM
MAXIMUM FRONT SUSPENSION	150MM (37MM OFFSET)	SHOCK SIZE	210 X 55, METRIC
SHOCK MOUNTING HARDWARE	UPPER - M8 X 30MM, LOWER - M8 X 25MM	SUGGESTED SHOCK SAG	30% - MOVES THE O-RING
SEATPOST SIZE	30.9	SEAT COLLAR SIZE	34.9
CABLE ROUTING	INTERNAL, FULL SLEEVE GUIDES; INTERNAL DROPPER POST ROUTING, DI2 AND FOX LIVE VALVE COMPATIBLE	FRONT DERAILLEUR	N/A
HEADSET SIZE	1.125" X 1.5" TAPERED ZERO STACK HEADSET INCLUDED, 44MM UPPER, 56MM LOWER, CANE CREEK DESCRIPTION: ZS44/28.6 ZS56/40	PIVOT BEARING SPECS	SEALED CARTRIDGE ENDURO MAX BLACK OXIDE BEARINGS
CHAINRING COMPATIBILITY	COMPATIBLE WITH STANDARD 1X SYSTEMS	MAXIMUM CHAINRING SIZE	34T WITH 52MM CHAINLINE, 168MM MINIMUM Q FACTOR
Q-FACTOR	168MM	ISCG COMPATIBILITY	ISCG05
BOTTOM BRACKET TYPE	73MM THREADED	BRAKE MOUNT TYPE	POST MOUNT
MAXIMUM REAR ROTOR SIZE	180MM	REAR WHEEL SPACING	148X12MM
REAR WHEEL THROUGH-AXLE SPEC	M12X1.75PX182L	FRONT WHEEL AXLE SPACING	110X15MM
MAX TIRE SIZE	27.5X2.8" (TIRE SIZES VARY BY BRAND, SOME MAY NOT FIT)		