



# XT4

## Underwater & Above Water Lighting Excellence

Create an impressive lighting ambiance both above and below water with the NEW Xtreme Trailer Series from OceanLED.

Light up your wake, create incredible night time lighting effects and attract fish and bait.

The new Xtreme Trailer Series has a higher lumen output than previous models with a sleek bezel design and an extremely robust body which is highly impact resistant.

Exceptionally easy to install on the transom, hull, or above water on your T-top, engine brackets or cowling, under your gunnels, in your engine compartment, and even on your trailer or tailgate for night launching.

Maintenance is easy due to its Tritonium™ coating (available on all OceanLED lights); just wipe away marine growth.

Built-in driver, ultra low power draw, no start-up current required, reverse polarity protection. Suitable for all types of hulls.

*Xtreme Trailer Series lights are designed for underwater or above water use on boats. Not intended for use as Dock Lighting; please see our Dock Light Series.*

**NEW!**

OceanLED Marine LTD  
Xtreme Trailer Series  
Specification Sheet

## Xtreme TRAILER SERIES

**Tritonium™**  
Optical Technology

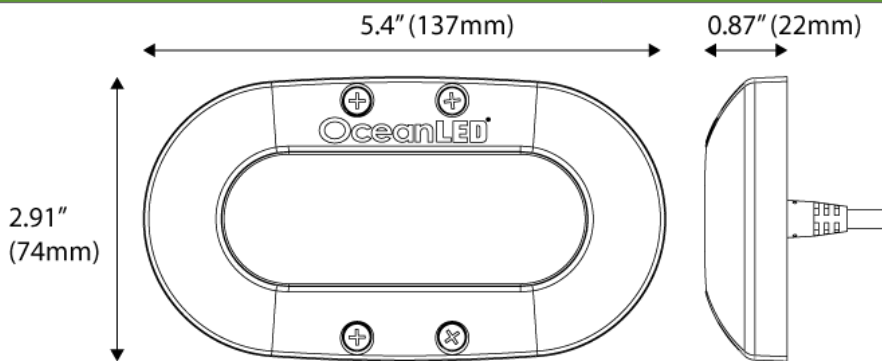


- Robust body design
- Improved bezel design
- 1/2" (12.5mm) Hole in Hull
- Equal to 80w Halogen
- Highly Impact Resistant
- 12/24V DC
- 40,000+ Hour Life
- Chemically Resistant Polymer
- Twin Core Wire
- Factory Sealed Unit

### Quick Specs

40K HOURS	12V DC	750		ABOVE WATER	ALL-IN-1 TECHNOLOGY	HIGHLY IMPACT RESISTANT	Tritonium
LIFE SPAN	24V DC	FIXTURE LUMENS	60° BEAM	BELOW WATER			

Description	Color	Part #	UPC/EAN #
XT4 Xtreme Ultra White LEDs	 Ultra White	O11301W	5051803005964
XT4 Xtreme Midnight Blue LEDs	 Midnight Blue	O11302B	5051803005971
XT4 Xtreme Sea Green LEDs	 Sea Green	O11303G	5051803005988

Mounting Recommendations		XT4
Boat size		up to 30' (9m)
Transom / Hull spacing		2-3' (0.5-1m)
Transom quantity		2
For above and below water use		
Technical		
Light output equivalent to		80W Halogen
Fixture Lumens* (total light output from a finished fixture)		750
Typical LED life expectancy		40,000+ Hours
Minimum-Maximum operating voltage DC		9-32V DC
Current / Amp draw (DC)		12V DC 0.5A 24V DC 0.25A
Approx. light penetration (avg. water quality)		16.5' (5m)
Approx. Light penetration (perfect water quality)		up to 42' (13+m)
Driver type		Internal
Physical		
		
Total weight		220g (0.49lbs)
Extension cable length (standard)		9' <sup>7</sup> / <sub>64</sub> ' (3m)
Hole cut-out for cable entry		1/2" (12.5mm)
Material		Chemically resistant optical polymer
Accessories		Part#
316L Stainless Steel Bezel X4		011416
<b>NEW</b> 4 Way V DC Power Junction Box		019901

\*Fixture Lumens rating is a measurement of total light output from a finished lighting fixture. This measurement can only be obtained from either a Goniophotometer or an Integrating sphere. Fixture Lumens is the most reliable, professional measurement of light output. OceanLED has heavily invested in these measurement apparatus and has had all its data verified by the Lighting Association of Great Britain.

## OceanLED Smart Light Technology

All OceanLED lights are factory sealed, essential for lighting components subjected to the corrosive marine environment.

### Active Thermal Control

ATC is a continuous monitoring system built into all OceanLED lighting products to prevent overheating, thus improving LED performance and lumen maintenance. In the event the lights become overheated, the ATC system will reduce the LED power level in order to protect the LEDs, or in extreme cases, turn off the fixture completely.



### Grade A Electrical-Opto Performance

OceanLED utilizes the very latest optical methods to achieve the highest Lumen Per Watt efficacy ratings on all its products. Combining optical precision with Grade A Electrical components ensures maximum life cycles, minimal heat exposure.



### OceanLED 3-Star Binning Promise

Millions of LEDs are produced every day, some better than others. LEDs are sorted or "Binned" according to their light output, emitted color, and electrical efficiency. OceanLED has developed its own unique bin process to ensure the highest quality grade LEDs are selected, essential for the quality and consistency on which OceanLED prides itself, and the consumer expects.



### NEW 4 Way V DC Power Junction Box



**OceanLED®**

LIGHT. YEARS AHEAD.

[www.OceanLED.com](http://www.OceanLED.com)

© 2015 Ocean LED Marine LTD  
All Rights Reserved

Specifications are subject to change without notice.

Trademarks are the property of OceanLED



**Ocean LED Marine LTD**  
Unit 1 Jacknell Road  
Dodwells Bridge Industrial Estate  
Hinckley,  
Leicestershire LE10 3BS  
United Kingdom  
Tel: +44 (0) 1455 637505  
Fax: +44 (0) 1455 238553  
[sales@oceanled.com](mailto:sales@oceanled.com)

**OceanLED USA LLC**  
778 South Military Trail  
Deerfield Beach  
Florida  
FL 33442-3025  
USA  
Tel: +1 954.523.2250  
Fax: +1 954.523.2249  
[sales@oceanledusa.com](mailto:sales@oceanledusa.com)