
OPERATION

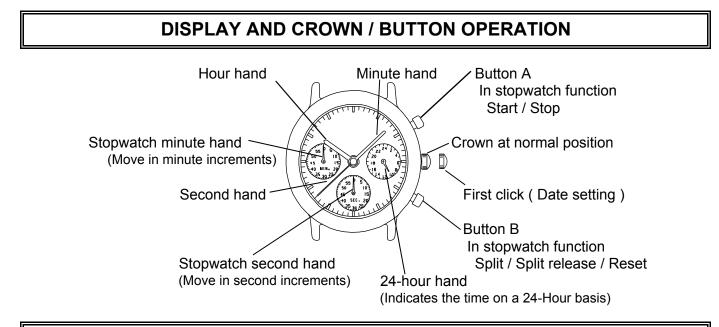


ADJUSTING THE STOPWATCH HAND POSITION


Before setting the time , check if the stopwatch second and minute hands are in the "0"(12 o'clock) position. *if the stopwatch is in use , press the button in the following order to reset it , and then , check if the hands return to "0" position. (For details , see "HOW TO USE THE STOPWATCH")

- * If the stopwatch is counting : $A \rightarrow B$
- * If the stopwatch is stopped : B
- * If the split time is displayed : B \rightarrow A \rightarrow B

If either of the stopwatch hands are not in the "0" position , reset them following the procedure below. Stopwatch minutes hand



1.Pull out the crown




Stopwatch second hand

2.Press button A or B to reset the stopwatch second and minute hands to "0"position.

*By pressing button A the hands move counter clockwise.*By pressing button B the hands


move counter clockwise.




3.Push the crown back to the normal position.

OPERATION

TIME SETTING




- 1.Pull out the crown to the second hand is at the 12 o'clock position. The second hand will stop on the spot.
- * Do not press any button. Otherwise, the chronograph hands will move.



2.Turn the crown to set the hour, minute and 24-hour hands to the desired time.As the hour hand moves, the 24-hour hand also moves correspondingly.


When setting the hour hand, check that the 24-hour hand is set property.




3.Push the crown back in to the normal position in accordance with a time signal.

HOW TO USE THE STOPWATCH

- The measured time is indicated by the stopwatch hands that move independently of the center and 24-hour hands. • The stopwatch can measure up to 60 minutes in seconds.
 - (The watch indicates the measured time in second increments by ignoring off the 1/10 seconds obtained.)

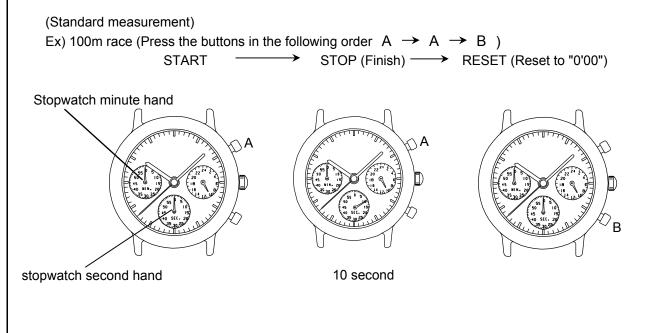

OPERATION

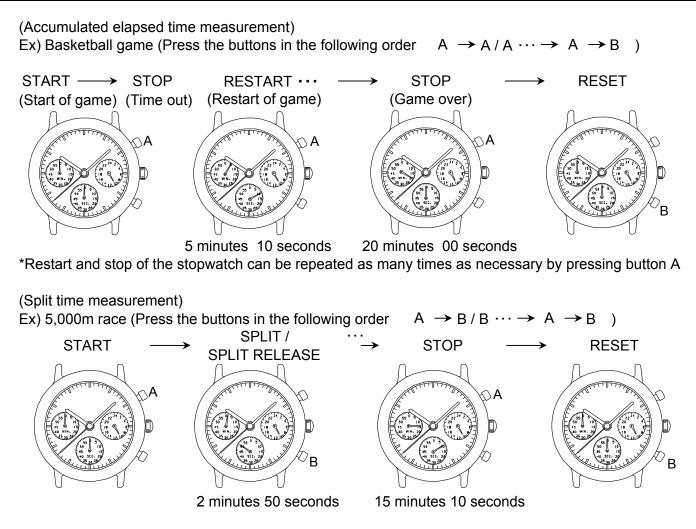

* Measurement and release of the split time can be repeated as many times as necessary by pressing button B.