



C 6310 Classical integrated hood of 60 cm with 3 speeds and 1 motor



LED

DESCRIPTION

Classical integrated hood of 60 cm with 3 speeds and 1 motor

LIFE STYLE

Easy

COLOURS



REFERENCE


EAN. 8421152146057



C 6310

FEATURES

Classic hood
Push buttons control panel (SS models)
Operating pilot light
3 speeds
Exhaust capacities:
Free Outlet, m³/h: 254
Max., m³/h: 235
Min., m³/h: 124
Noise (LwA) Max Speed, dB: 62
Noise (LwA) Min Speed, dB: 45
2 Integrated LED lamps
3 aluminium filters
Finger Print Proof Front Panel (SS)

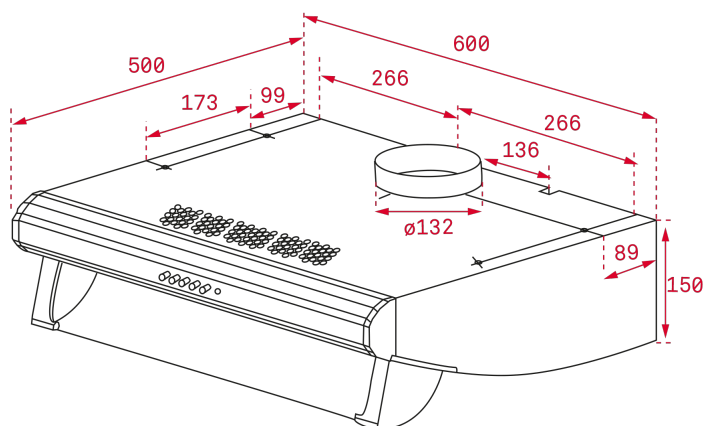

DIMENSIONS

Product height (mm): 150

Product width (mm): 600

Product depth (mm): 500

Product length (mm):

Net weight (Kg): 6,65

TECH SPECS

PARTICULAR CHARACTERISITICS

Type of hood: Classic

Style: Integrated

Certificates: CE; CB; Rohs

Ø Outlet (mm): 120

Type of inner light: LED

Inside light Consumption (W): 6

Plug type: European plug

Power rate (V): 130

Frequency (Hz): 50/60

Total hood power (W): 117

Number of motors: 1

Motor power (W): 105

Exhaust Capacity - Free Outlet (m3/h): 254

EU REGULATION NO. 65/2014
&66/2104

Annual energy consumption AEC kWh/annum (kWh): 67,1

Energy Efficiency Class: D

Fluid Dynamic Efficiency (FDEhood): 8,1

Fluid Dynamic Efficiency class: E

Light Efficiency (Lehood) lux/Watt: 4,8

Lighting Efficiency class: F

ACCESSORIES

MODELS

Grease Filtering Efficiency class: D
Air flow (Qmin) m3/h: 115
Air flow (Qmax): 235
Noise (LwA) Min Speed (dB): 45
Noise (LwA) Max Speed (dB): 66
Energy Efficiency Index (EEL): 91,0
Time increase factor: 1,7
Electric power input at best efficiency point (Wbep) W: 94,1
Nominal power of the lighting system (WL) W: 12
Average illumination of the lighting system on the cooking surface (Emiddle) Lux: 58

Anti Return valve: Yes
Outlet extension: Yes
Optional Charcoal Filter: C2R
Charcoal filter description: CHARCOAL FILTER C2R

Number of filters: 2
Filter description: Aluminium
Control panel: Push buttons
Number of speeds: 3
Fingerprint proof front panel: Yes



C 6310

ENERGY LABEL

